

Table A.4 Port Canaveral Nearshore Disposal : 14-1/2 Month Post-Project Sediment Samples (IN-92-XX)

| Sample | Florida State Plane Coordinates (ft) | Percent Passing | | | | | | | | Estimated Shell Content (%) |
|---------|--|-----------------|--------|--------|---------|---------|---------|---------|---------|-----------------------------------|
| | | No. 40 | No. 60 | No. 80 | No. 100 | No. 140 | No. 170 | No. 200 | No. 230 | |
| IN-1-I | E 628,007 N 1,445,391 | 99.5 | 96.3 | 93.5 | 90.6 | 43.6 | 35.0 | 20.3 | 12.3 | 0.5 |
| IN-2-I | E 628,449 N 1,454,570 | 99.8 | 97.4 | 93.3 | 90.8 | 43.7 | 31.6 | 20.2 | 12.7 | 0.2-1.5 |
| IN-3-I | E 628,008 N 1,455,110 | 99.6 | 98.5 | 97.0 | 89.5 | 37.7 | 29.4 | 15.6 | 9.5 | 0.4-1.0 |
| IN-4-I | E 628,572 N 1,449,821 | 99.3 | 98.2 | 96.8 | 95.2 | 51.8 | 38.9 | 24.7 | 16.9 | 0.7-1.3 |
| IN-5-I | E 628,280 N 1,452,715 | 99.6 | 98.8 | 97.3 | 94.0 | 43.7 | 31.5 | 19.5 | 12.8 | 0.4-1.0 |
| IN-6-I | E 628,519 N 1,453,750 | 99.7 | 99.1 | 97.2 | 93.3 | 38.8 | 30.9 | 20.9 | 13.9 | 0.5-1.0 |
| IN-7-I | E 628,200 N 1,454,761 | 99.0 | 98.5 | 95.6 | 92.2 | 38.3 | 28.9 | 15.7 | 10.0 | 1.0-1.3 |
| IN-8-I | E 628,300 N 1,453,469 | 99.8 | 99.4 | 98.2 | 96.4 | 44.3 | 33.8 | 20.1 | 12.8 | 0.2-0.4 |
| IN-9-I | E 628,759 N 1,454,241 | 99.6 | 99.0 | 97.8 | 96.3 | 55.7 | 42.6 | 27.9 | 19.2 | 0.4-0.7 |
| IN-10-I | E 627,600 N 1,455,137 | 99.8 | 99.6 | 98.0 | 93.4 | 33.6 | 24.2 | 13.4 | 7.7 | 0.2-0.3 |
| IN-11-I | E 627,173 N 1,453,046 | 99.7 | 99.4 | 97.5 | 93.0 | 21.2 | 14.2 | 7.3 | 4.1 | 0.3-0.5 |
| IN-12-I | E 627,950 N 1,453,814 | 97.9 | 96.7 | 89.5 | 80.0 | 26.4 | 20.3 | 13.9 | 10.0 | 2.0-2.5 |
| IN-13-I | E 627,750 N 1,453,905 | 96.5 | 94.7 | 87.5 | 76.7 | 21.4 | 15.5 | 9.9 | 6.7 | 3.5 |
| IN-14-I | E 628,242 N 1,453,600 | 99.9 | 99.3 | 86.4 | 67.3 | 11.3 | 6.7 | 3.5 | 2.3 | 0.1 |

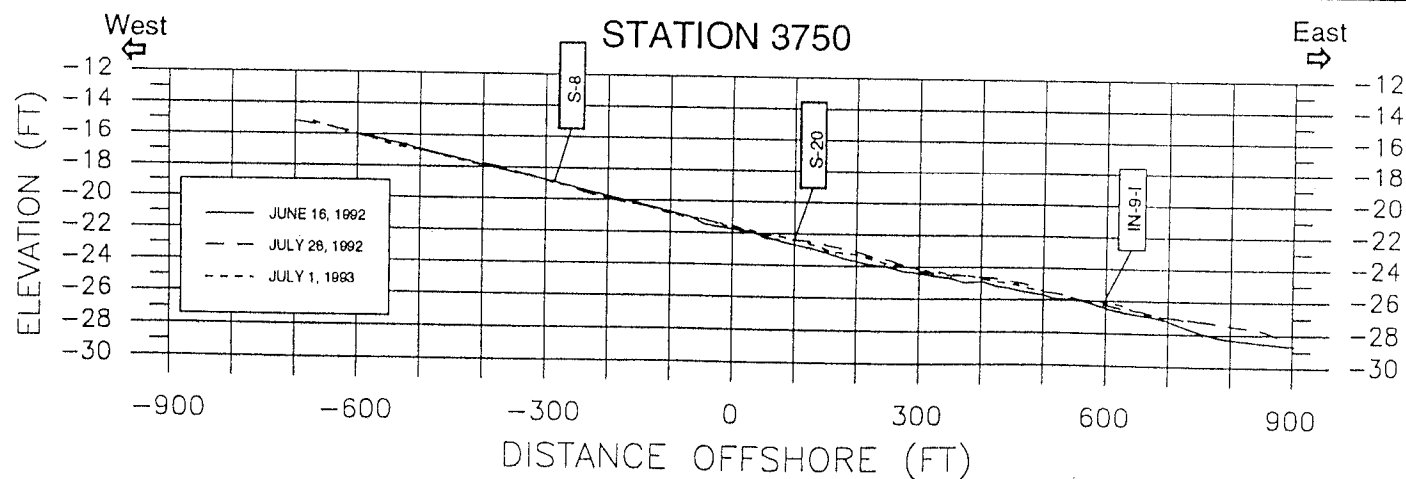
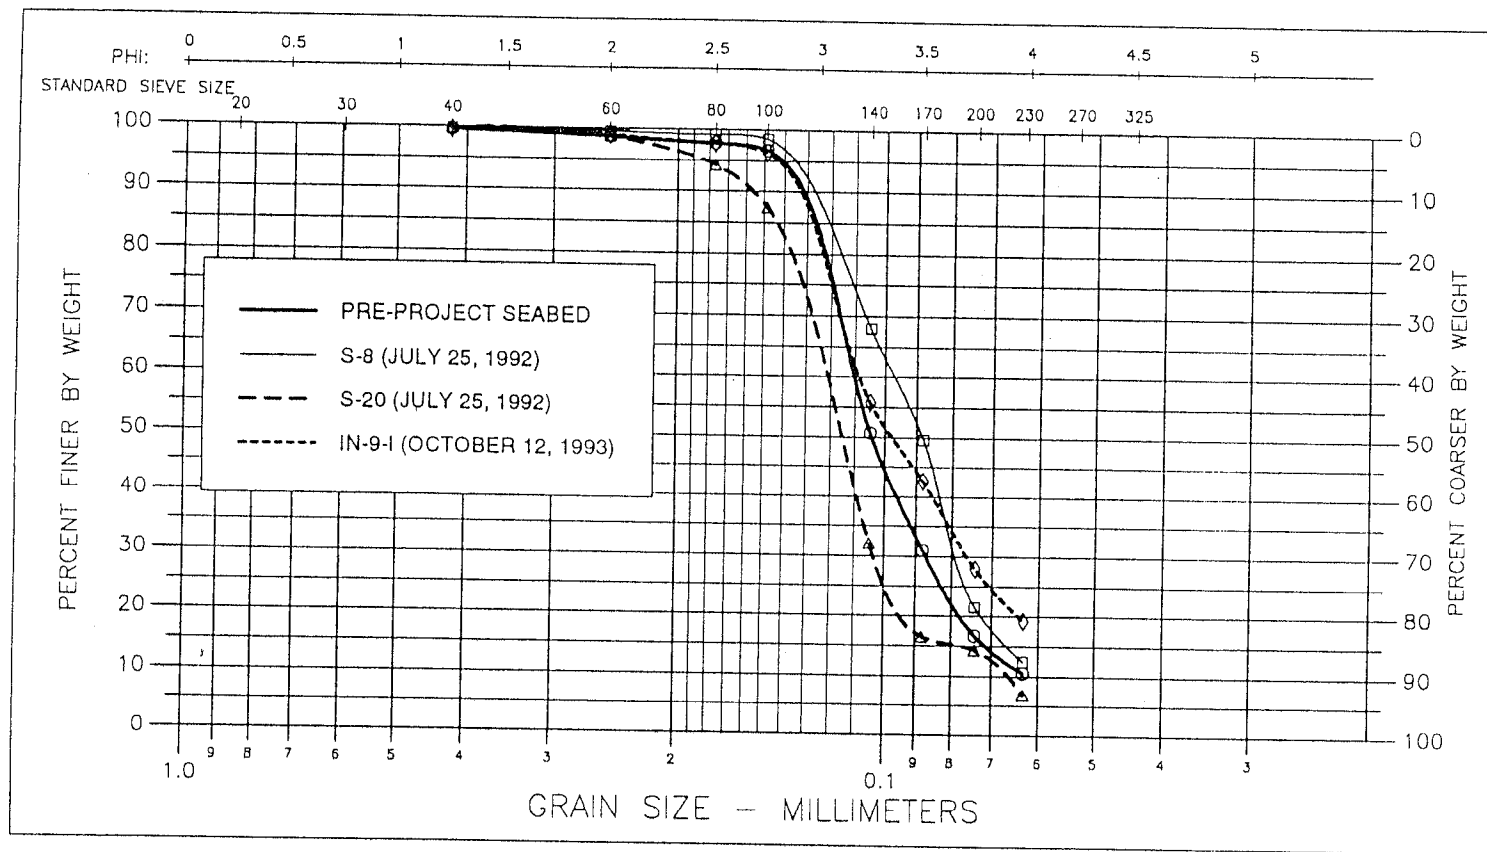


Figure C.7 Cross-Shore Sediment and Bathymetric Data : Station 3750.